



POWER METERING

IP PLATFORM

Designed to deliver precise energy measurement, Dolphin Semiconductor's platform is tailored to ensure compliancy with Class 0.2 s standards for accurate billing.

Its highly accurate analog front-end (AFE) reduces errors in power calculations, making it suitable for both single-phase (residential) and three-phase (industrial) applications.


By supporting both configurations within a single IP, it simplifies design processes, accelerates development timelines, and enhances flexibility, allowing scalability across various power metering solutions while minimizing costs and complexity.

APPLICATIONS

> **Single-phase meter**

> **Three-phase meter**

ONE FITS ALL

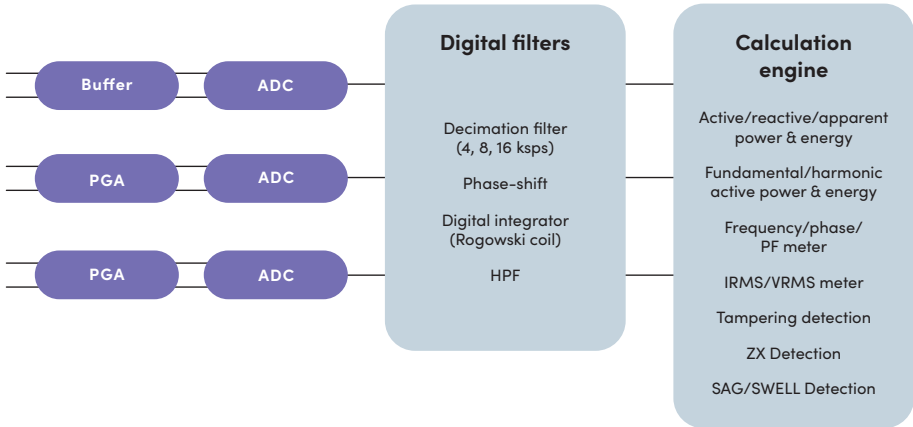

MAIN BENEFITS

Low noise at low frequency

Low offset

Very low gain error < 0.05%
(for class 0,1)

Integrated power computation
algorithms

Pin and BOM cost reduction

Synchronized channels and phase
shifting calibration

KEY FEATURES

22-24 bit $\Delta\Sigma$ ADC

Only 1mm² total IP footprint

Built-in Power Energy Computer (PCE)

Programmable data rate up to 32 ksps

Exceeds IEC 62053-22 Classes
0.2 s requirements

Chopper stabilized PGA

Input DC blocking capacitor free



DOLPHIN
SEMICONDUCTOR

www.dolphin-semiconductor.com